

Wall-mounted type air disinfection

Model Number รหัสรุ่น	Wall-mounted type air disinfection
Dimensions (mm) กว้าง x ยาว x สูง	500 × 200 × 270
Output ปริมาณโอโซนที่ผลิตได้	3g-10g/h 3g-10g/ชม.







Movable type air disinfection

Model Number รหัสรุ่น	Movable type air disinfection
Dimensions (mm) กว้าง x ยาว x สูง	1000 x 400 x 300
Output ปริมาณโอโซนที่ผลิตได้	20g-50g/h 20g-50g/ชม.

43



PROJECT CASE

Industrial Sewage Treatment





Flue Gas Denitrification

























Ozone

CORE TECHNOLOGY



Discharge Chamber

Special glass tube discharge chamber (patent No. ZL2011 20385785.0), The double air gap discharge technology, high quality import glass tube, which can give full play to the discharge effciency and guarantee the big output high concentration and low power consumption.



Control circuit board

The Ozone generator control board system is research and design by Pioneer Co.,Ltd. It control the normal work of the ozone generator power supply, and it can anti-interference, protect the electric circuit and the components. Output and concentration of ozone can be smooth adjustment according to actual needs.



Transformer

High voltage transformer converts the output of the inverter circuit to the high voltage power which is suitable for the dielectric barrier discharge to produce ozone. In order to match the capacity of the load of the chamber, the requirement of the parameters is different from that of the common transformer. Due to the load capacitance of discharge chamber is change in the running process, it require transformer has a certain leakage to balance the change to protect the electronic components.

SUPPORTING EQUIPMENTS







Ozone Oxidation Tower / Aeration Plate

The titanium ceramic / metal aeration plate can produce uniform of small bubbles, in order to obtain larger bubbles and water interface, to ensure the maximum rate of material transfer.



Carmen effect and boundary layer separation, resulting in high efficiency of mixing jet water, while the micron scale bubble can be highly dissolved in water. No blocking and lower maintenance cost.





Ozone destructor

Ozone destructor system characteristics: high efficiency. Low energy consumption, long life, small size, no need to maintain.



SUPPORTING EQUIPMENTS



Ozone pre-treatment system

Ozone will be inhaled into water by negative pressure caused by high velocity flow of injector based on venture principal, which is a better way to improve ozone and water mixing efficiency.



Close circulation cooling water system

Includes plate heat exchanger, circulating water pump, expansion tank, pressure switch, etc.



OXYGEN GENERATOR ADSORPTION AIR DRYER

It can guarantee the quality of feed gas, improve the operating efficiency of ozone generator and economical benefit



NITROGEN SUPPLEMENT SYSTEM

Adding a certain amount of nitrogen gas can improve the operating efficiency of ozone generator and extend the life of dielectric tube when pure oxygen is used as feed gas.



COMPOSITION OF OZONE GENERATOR






SYSTEM TECHNICAL PROCESS

Ozone generator with air source

Air Compressor → gas storage tank → water separator → refrigerated air dryer → oil elimination filter → adsorption air dryer → dust elimination filter → pressure reducing valve → ozone generator

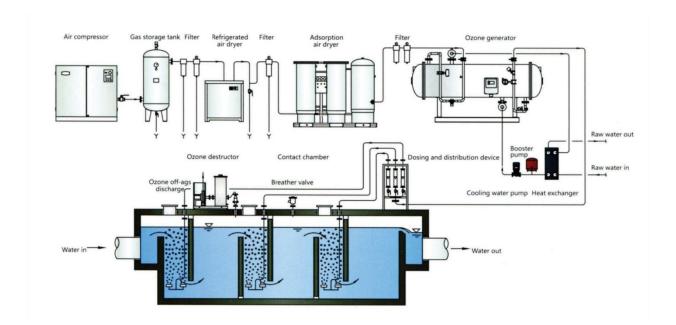

Ozone generator with liquid oxygen source

Liquid oxygen storage tank \longrightarrow carburetor \longrightarrow pressure reducing device \longrightarrow dust elimination filter \longrightarrow ozone generator

