

Industrial Dehumidifier

FDH-290BC • FDH-2108BC • FDH-2138BC • FDH-2158BC


FUNCTION / FEATURES

- Features an imported famous brand compressor.
- Digital humidity display, which can be set and controlled.
- Programmable start-up time (1 h – 24 h).
- Wind turbine for high capacity dehumidification.
- Four wheeled design, convenient for moving.
- Easy to operate failure alarm.
- Automatic defrosting function, which can effectively protect the compressor, to ensure its normal operation.

- ใช้ส่วนประกอบ compressor ที่นำเข้ามีคุณภาพมาตรฐาน และเป็นแบรนด์ที่นิยม
- หน้าจอเป็น digital display สามารถตั้งค่าและควบคุมได้อย่างอิสระ
- ตั้งเวลาเปิดปิดอัตโนมัติได้ 24 ชั่วโมง
- ติดตั้งใบพัด turbine wind wheel ช่วยให้การดูดความชื้นมากขึ้น
- การออกแบบเครื่องการทำงานของเครื่องยึดหลัก air principle theory ซึ่งจะมีช่องลมเข้าด้านหน้าและช่องลมออกด้านบน
- มีล้อเลื่อน 4 ล้อ ช่วยให้เคลื่อนย้ายได้สะดวกขึ้น
- มีระบบละลายน้ำแข็งอัตโนมัติเมื่อน้ำแข็งเกาะที่คอยเย็น เพื่อป้องกัน compressor เสียหาย



FDH-290BC / FDH-2108BC

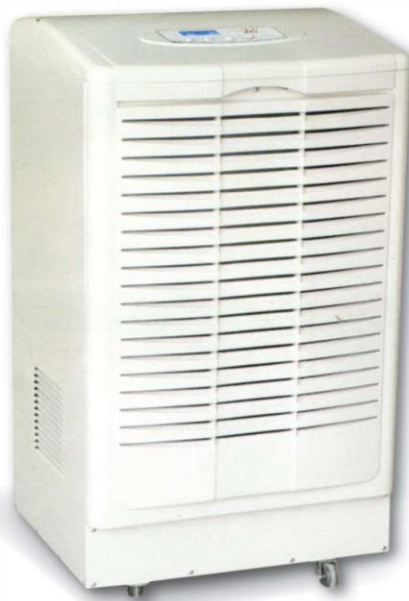

FDH-2138BC / FDH-2158BC

Model Number รหัสรุ่น	FDH-290BC	FDH-2108BC	FDH-2138BC	FDH-2158BC
Dehumidity Capacity ดูดความชื้นได้	90L/D 90 ลิตร/วัน	108L/D 108 ลิตร/วัน	138L/D 138 ลิตร/วัน	158L/D 158 ลิตร/วัน
Voltage/cycle แรงดันไฟฟ้า/ความถี่	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Air Volume แรงลม	1000m ³ /h 1000m ³ /ชม.	1100m ³ /h 1100m ³ /ชม.	1200m ³ /h 1200m ³ /ชม.	1400m ³ /h 1400m ³ /ชม.
Work temperature อุณหภูมิที่สามารถทำงานได้	5-35 °C 5-35 องศา	5-35 °C 5-35 องศา	5-35 °C 5-35 องศา	5-35 °C 5-35 องศา
Power Input (W) กำลังไฟ	1650w	1750w	1850w	2000w
Dimensions (mm) กว้าง x ยาว x สูง	542x642x1017	542x642x1017	542x462x1117	542x462x1117
Weight (kg) น้ำหนัก (กิโลกรัม)	60	65	70	75
Usable floor area พื้นที่	80-120m ²	100-150m ²	120-160m ²	150-180m ²

CONTROL PANEL

